


Off-Momentum LM App Settings

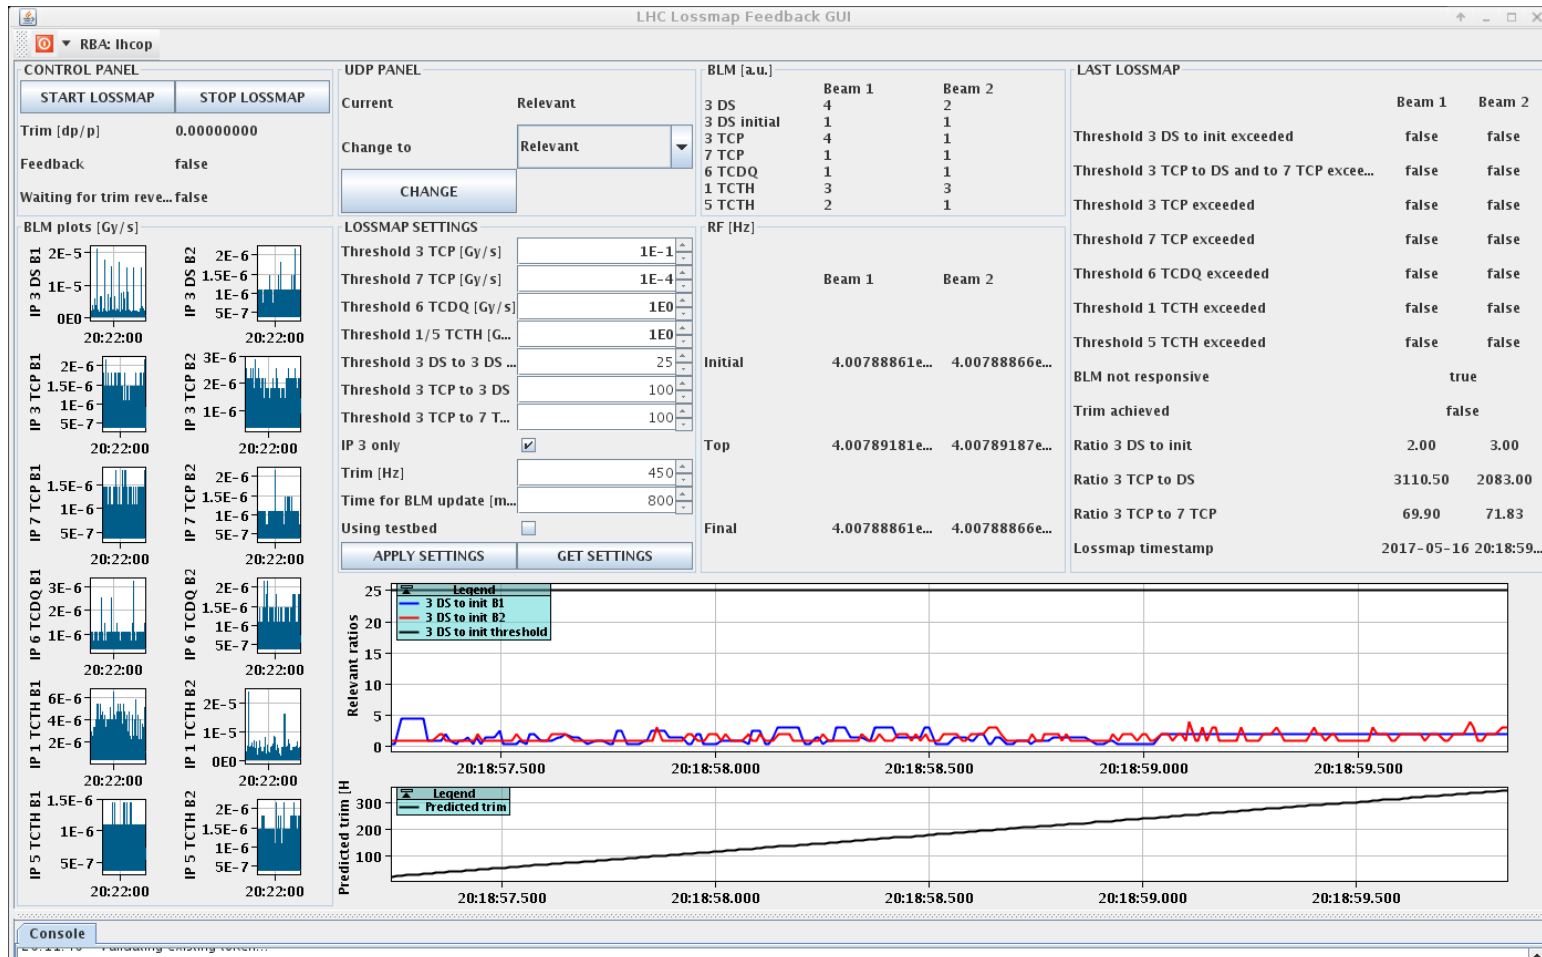

In order to use the off-momentum feedback there is a setting called **UDP Panel** that needs to be set to **Relevant** in order to receive the 100Hz BLM data. After the off-momentum loss map is done we have to set it back to "None". This is very important because the data used in the off-momentum class competes with the collimation alignment class and will delay the arrival of the BLM data.

See also:

- [LHC Coll elogbook, Tue 16th May 2017;](#)
- [LHC OP elogbook, Tue 16th May 2017;](#)